

(19) Japan Patent Office (JP)

(12) UNEXAMINED UTILITY MODEL PUBLICATION (U)

(11) Utility Model Publication NO.: 1990-122616

(43) Date of Publication: October 8, 1990

(51) Int. Cl. <sup>5</sup> :	Dom. Cl. Sym.	JPO File No.
A 45D 33/00	Z	8608-3B
40/00	P	8608-3B
	G	7817-3B

Examination not requested

Number of Claims: 2 (2 pages)

---

(54) [Title of the Device] COSMETIC CONTAINER WITH APPLICATOR

(21) Utility Model Application NO.: 1989-32396

(22) Application Date: March 22, 1989

(72) Creator:

Kazuo SUZUKI

c/o YOSHINO KOGYOSHO CO., LTD.

2-6, Oshima 3-chome, Koto-ku, Tokyo

(71) Applicant:

YOSHINO KOGYOSHO CO., LTD.

2-6, Oshima 3-chome, Koto-ku, Tokyo

(74) Representative:

Munenori SATO, Patent Attorney, et al.

**(57) Claims of Utility Model**

(1) A cosmetic container with an applicator comprising:

a cylindrical container body 1;

a cylindrical inner container 23 for containing a cosmetic material, the cylindrical inner container 23 being slidably inserted into the cylindrical container body 1 so as to move up and down and being energized upward by a spring 29;

a stretchable thin-film cylindrical member 32 having a lower-opening circumferential edge portion 33 and an upper end portion 34, the lower-opening circumferential edge portion 33 being airtightly attached to an inner surface of a lower part of the container body 1 and the upper end portion 34 being airtightly attached to a bottom outer surface of the cylindrical inner container 23;

a vent 3 provided in a bottom of the cylindrical container body 1, the vent 3 communicating an interior of the stretchable thin-film cylindrical member 32 with an exterior of the cylindrical container body 1;

an application stick 39 detachably fitted to an opening 7 of the container body 1, the application stick 39 being provided at its tip portion with an application member 44, with which a cosmetic material 26 held in the cylindrical inner container 23 is pressed into contact; and

an elastic opening-sealing-ring 41 fitted to a fitting portion 40 of the application stick 39, the elastic opening-sealing-ring 41 being airtightly pressed into contact with an inner surface of the opening 7 of the container body 1.

(2) A cosmetic container with an applicator according to claim 1, wherein, instead of airtightly attaching the upper end portion 34 of the stretchable thin-film cylindrical member 32 to the bottom outer surface of the lower part of the cylindrical inner container 23, the upper end portion 34 of the stretchable thin-film cylindrical member 32 is airtightly sealed and provided

separate from the stretchable thin-film 32.

[Brief Description of the Drawings]

Fig. 1 is a cross sectional view of a device of claim 1 according to one embodiment, in which the right half shows a state where a cosmetic material is held in the device and the left half shows a state where no cosmetic material is held in the device. Fig. 2 is a cross sectional view of a principal part of a device according to another embodiment. Fig. 3 is a cross sectional view of a prior art device.

- 1. container body
- 3. vent
- 7. opening
- 23. cylindrical inner container
- 26. cosmetic material
- 29. spring
- 32. thin-film cylindrical member
- 33. lower-opening circumferential edge portion
- 34. upper end portion
- 39. application stick
- 40. fitting part
- 41. opening sealing ring
- 44. application member

## ⑫ 公開実用新案公報(U)

平2-122616

⑬ Int. Cl.<sup>3</sup>

A 45 D 33/00

40/00

識別記号

Z

P

G

庁内整理番号

8608-3B

8608-3B

7817-3B

⑭ 公開 平成2年(1990)10月8日

審査請求 未請求 請求項の数 2 (全2頁)

⑮ 考案の名称 塗布具付化粧料容器

⑯ 実 願 平1-32396

⑰ 出 願 平1(1989)3月22日

⑱ 考 案 者 鈴木 一 男 東京都江東区大島3丁目2番6号 株式会社吉野工業所内

⑲ 出 願 人 株式会社吉野工業所 東京都江東区大島3丁目2番6号

⑳ 代 理 人 弁理士 佐藤 宗徳 外1名

## ㉑ 実用新案登録請求の範囲

(1) 筒状の容器本体1内に、化粧料収容用の筒状内容器23を上下摺動自在に嵌入し、筒状内容器23はスプリング29で上方に向けて付勢して設け、そして、伸縮自在な薄膜製筒体32の下部口縁部33を、容器本体1の下部内面に気密に取り付け、薄膜製筒体32の上端部34を、筒状内容器23の下部外面に気密に取り付け、容器本体1の底部には、薄膜製筒体32内と容器本体1外とを連通させる通気孔3を設け、さらに、容器本体1の開口部7に着脱自在に嵌着できる塗布棒39を設け、塗布棒39の先端には、筒状内容器23に収容された化粧料26が圧接される塗布体44を設けると共に、塗布棒39の嵌着部40には、容器本体1の開口部7の内面に気密に圧接する弾力性を有する口部密封リング41を嵌着した塗布具付化粧料容器。


(2) 請求項1記載の塗布具付化粧料容器において、薄膜製筒体32の上端部34を、筒状内容器23の下部外面に気密に取り付ける代わりに、薄膜製筒体32の密封して気密に形成した上端部34を、筒状内容器23と分離させて形成した塗布具付化粧料容器。

## 図面の簡単な説明


第1図は請求項1記載の考案の一実施例の断面図で、右半分は化粧料が充填され、左半分は化粧料が充填されない状態を示す断面図、第2図はその実施例の別の実施例の要部の断面図、第3図は従来例の断面図である。

1……容器本体、3……通気孔、7……開口部、23……筒状内容器、26……化粧料、29……スプリング、32……薄膜製筒体、33……下部口縁部、34……上端部、39……塗布棒、40……嵌着部、41……口部密封リング、44……塗布体。

第 1 図

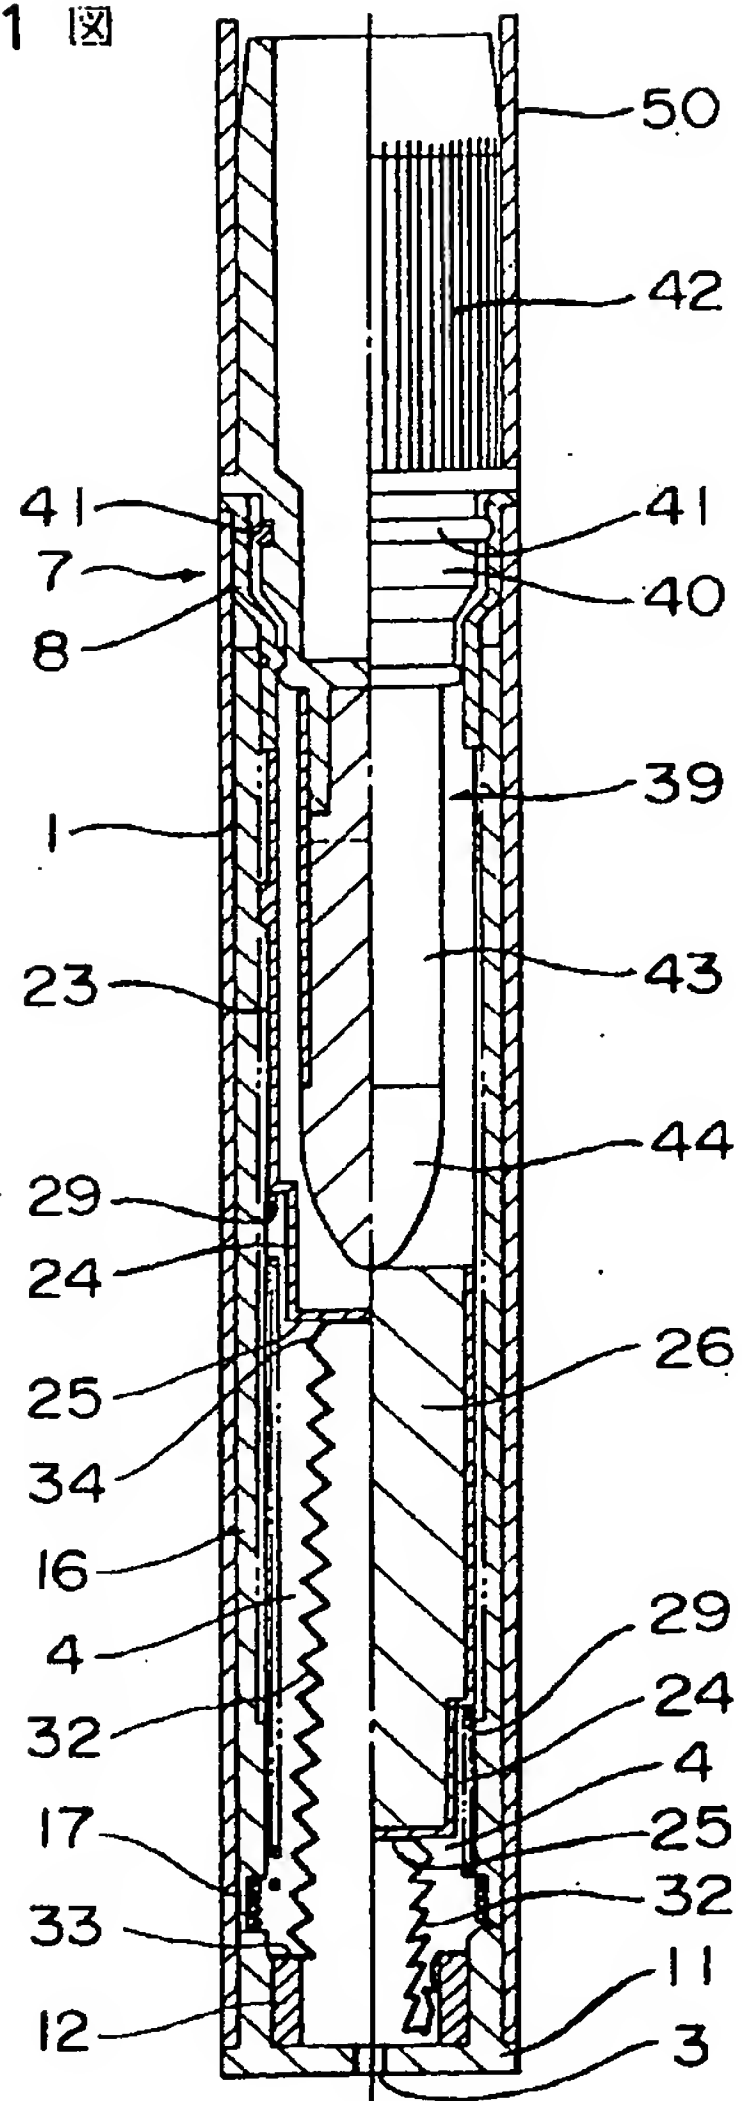

第 2 図

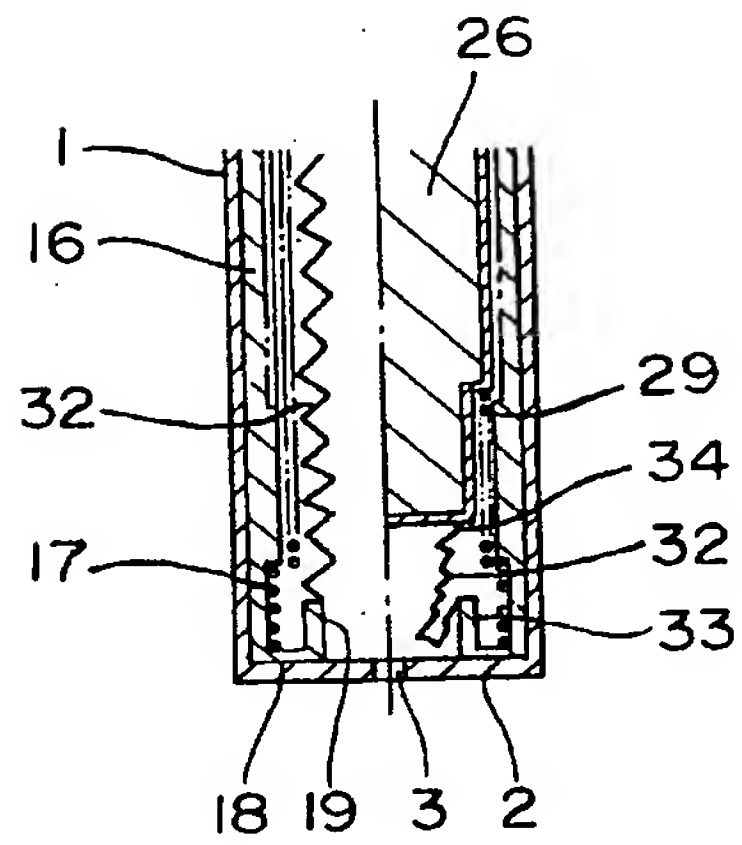

第 3 図

